



## TANDEMKROSS Remington 597 Trigger Spring Kit Installation Instructions

V1.0

[www.tandemkross.com](http://www.tandemkross.com)


For more info or support contact [CustomerService@tandemkross.com](mailto:CustomerService@tandemkross.com)

### **Attention:**

**Before you begin, be certain that the firearm is clear and safe.**

Follow the instructions in your owner's manual to remove the trigger mechanism from your rifle. It is always smart to use a rubber band around the magazine well to prevent the Magazine Hold Open and Spring from falling off and getting lost.

1) Using a small punch, gently knock the hammer pin (red circle) out either direction.

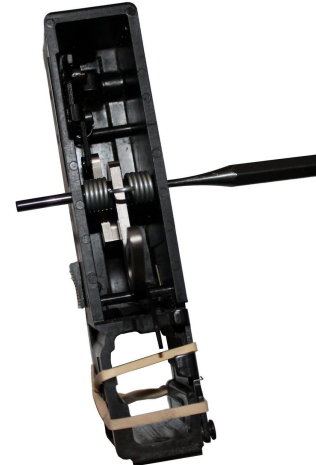

2) Lift the stock hammer, spring, and plastic spacers out of the trigger housing assembly.



3) Refer to the image to the right as a guide to show how the hammer spring and hammer will be oriented inside the assembly. Place the stock hammer in the TANDEMKROSS trigger spring in between the metal spacers and use a small punch to hold them within the trigger housing assembly.



4) Gently reinstall the hammer pin while using the small punch on the other side of the assembly as a guide to keep the components straight.



5) To reinstall your trigger housing assembly you'll need to make sure the hammer is engaged with the sear. To do this, you might need to simultaneously pull back on the trigger linkage bar if it fell down during installation. Follow your owner's manual to reassemble your rifle.

**Safety and functionality check:** Cycle the action and load a snap cap or spent shell into the chamber. With the rifle safety on "safe" and the barrel pointed in a safe direction, verify that rifle will not fire when you attempt to pull the trigger. Place the safety now on "fire" and now verify that the hammer falls.